

4/2 and 4/3 Directional Control Valve, Manually Operated

RPR3-06


Size 06 (D03) • Q_{max} 80 l/min (21 GPM) • p_{max} 350 bar (5100 PSI)



Technical Features

- › Direct acting manually operated directional control valve with subplate mounting interface acc. to ISO 4401, DIN 24340 (CETOP 03)
- › High transmitted hydraulic power up to 350 bar, optimized design for minimized pressure drop
- › Three chamber housing design for production cost saving
- › Manual lever and actuation element can be rotated in 90° increments for flexible installation
- › Wide range of interchangeable spools available
- › Springless, detented valves available, valve holds last selected position, available for all spools
- › In the standard version, the valve housing is phosphated for basic surface corrosion protection and as preparation for painting. Steel parts are zinc-coated for 240 h salt spray protection acc. to ISO 9227
- › Enhanced surface protection for mobile sector available for the valve housing and steel parts (ISO 9227, 520 h salt spray)

ISO 4401-03-02-0-05

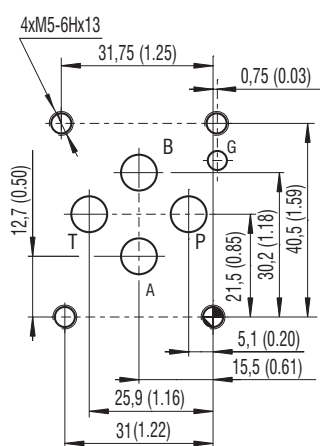

Ports P, A, B, T - max $\varnothing 7.5$ mm (0.29 in)

Model Code	Z11	R11	J15
Symbol			


Technical Data

Valve size	06 (D03)	
Max. flow	l/min (GPM)	80 (21.1)
Max. operating pressure at ports P, A, B	bar (PSI)	350 (5100)
Max. operating pressure at port T	bar (PSI)	100 (1450)
Operating force	N (lbf)	< 50 (11.2)
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... +212)
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... +248)
Service life	cycles	10 ⁶
Weight	kg (lbs)	1.6 (3.53)
	Datasheet	Type
General information	HA 0060	Products and operating conditions
Mounting interface	HA 0019	Size 06
Spare parts	HA 8010	

Characteristics measured at $v = 32$ mm²/s (156 SUS)


Operating limits

Operating limits for maximum hydraulic power and rated lever force.

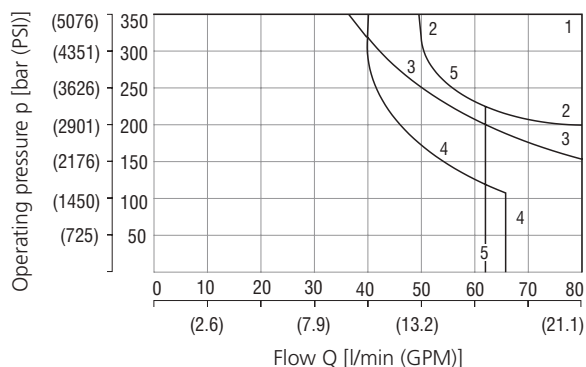

A51	3	H11	3	R11	1
B11	5	H15	1	Y11	2
B15	1	J15	1	Y15	1
C11	4	J75	1	Z11	1
C15	1			Z15	1


Pressure drop related to flow rate

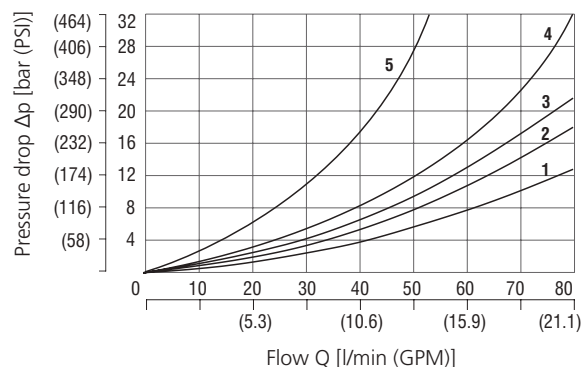


	P-A	P-B	A-T	B-T	P-T
Z11, Z15, B11, B15, R11, J15	2	2	3	3	
C11, C15	3	3	4	3	5
H11, H15	2	2	2	2	3
Y11, Y15	2	2	2	2	
A51, J75	2	2			

For operating limits under conditions and flow directions other than shown contact our technical support. Admissible operating limits may be considerably lower with only one direction of flow (A or B plugged, or without flow.)

Dimension in millimeters (inches)

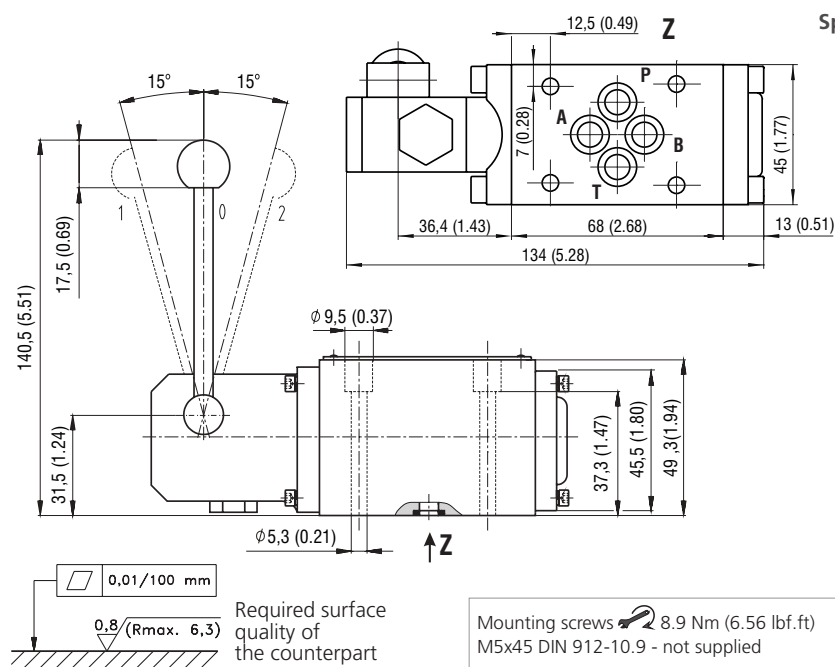

Spool position according to the position of hand lever

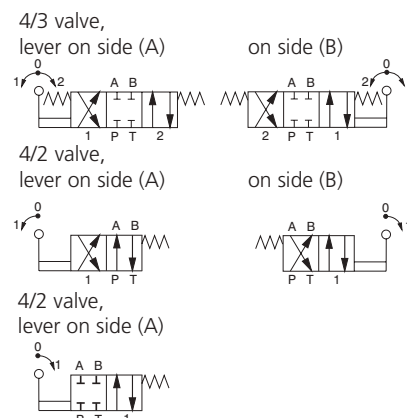

Manual lever and actuating section are shown in the most frequently used standard position. Both elements can be rotated in 90° increments. For other positions of lever and actuating section contact our technical support.

Spool Symbols

Type	Symbol	Interposition	Type	Symbol	Interposition	Type	Symbol	Interposition
Z11			B15			X11		
C11			Y14			X21		
H11			Z21			C55		
Y11			H11			Z15		
B11			C51			Z55		
L21			Z11			Y55		
Z15			H51			J15		
C15			Y11			J75		
H15			R11			R25		
Y15			A51			X15		
			R21					

Ordering Code

4/2 and 4/3 directional control valve, manually operated

Valve size

Number of valve positions

two positions
three positions

Spool symbols

see the table "Spool Symbols"

RPR3-06

No designation

A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)

No designation
V

A1
B1

Manual lever and actuating section position
standard, lever on side A, upward
standard, lever on side B, upward

Surface treatment

standard

Seals

NBR

FPM (Viton)

The table of spool connections is an overview of preferred and commonly produced types. Contact our technical support for their identification, feasibility and operating limits.